




Crafted

Crafted


Crafted celebrates skillful artistry and innovative materials with an intentional focus on creating products that work together in a holistic approach. Abstract patterns, versatile colors and captivating textures set a creative foundation to the space while blending the incredible benefits of ECONYL®, regenerated nylon and SustainaTM, a non-PVC, non-polyurethane backing system.

As a result, this contemporary carpet tile collection delivers a complete solution that redefines the interior experience with a one-of-a-kind sustainable application. It's carpet tile that you can feel good about specifying.

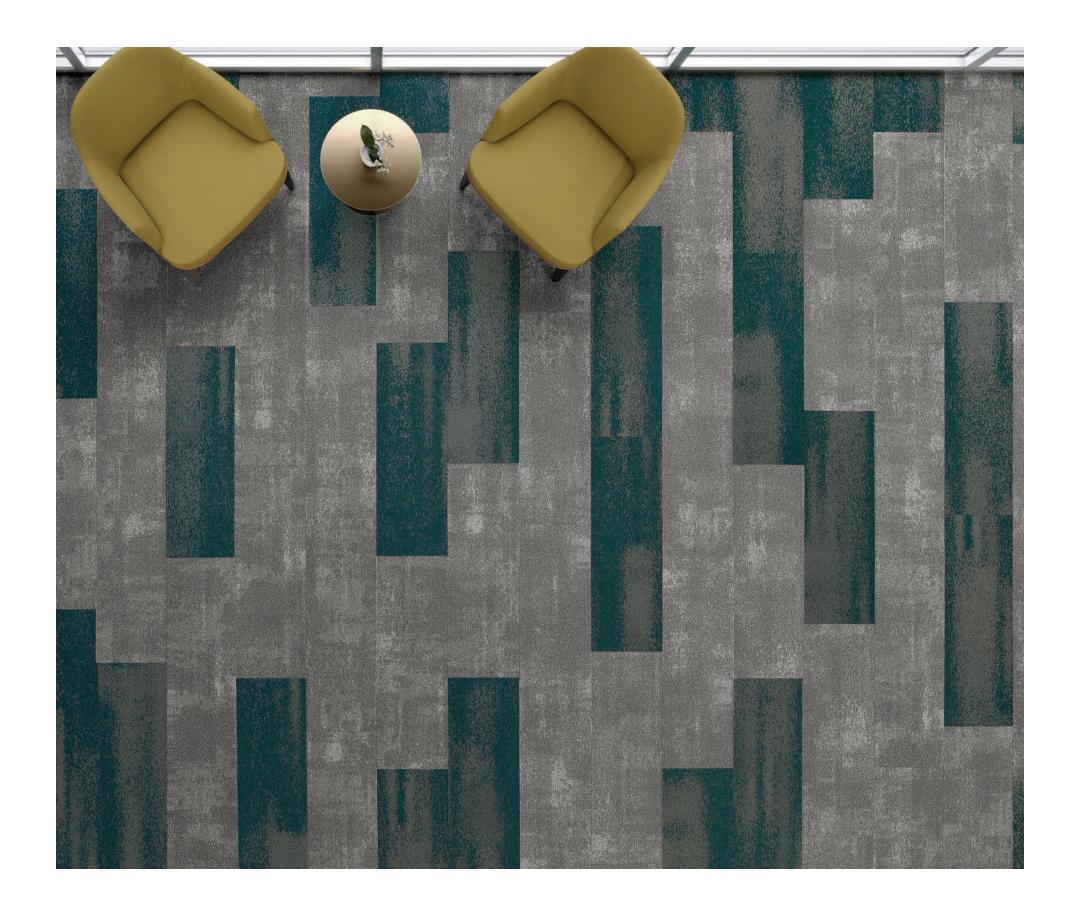


FOAM FROST



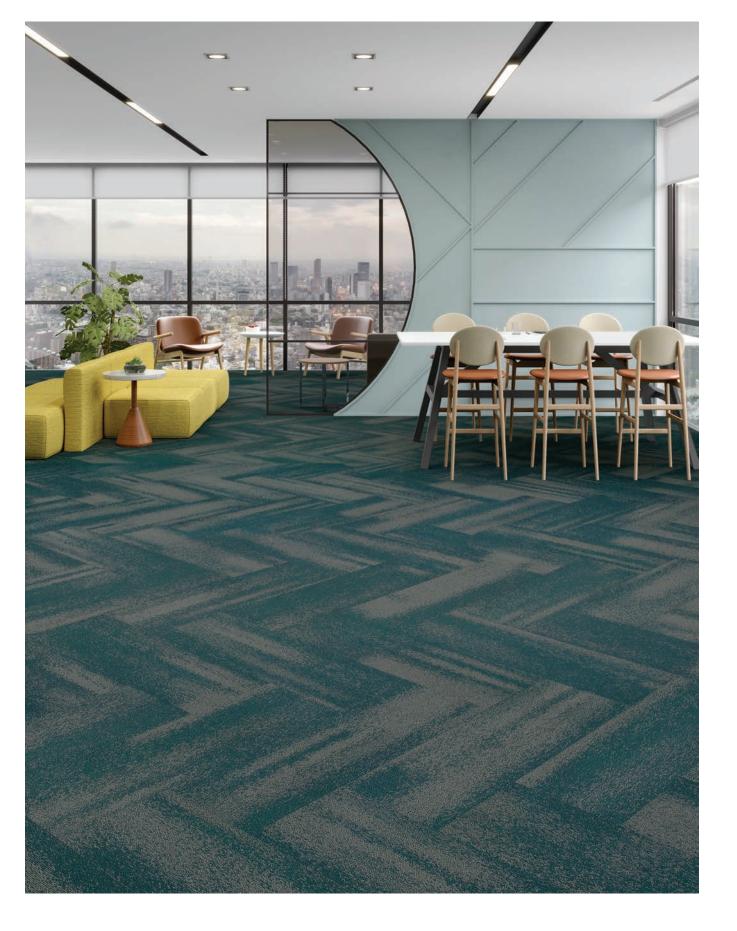



Crafted's incredible sustainability story.

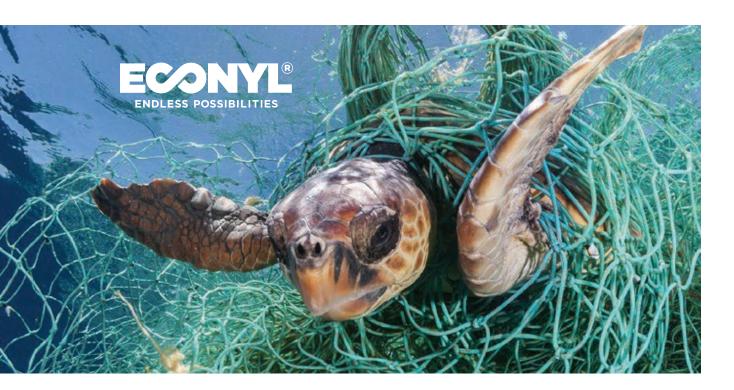

The beauty of ECONYL® regenerated fiber.







It takes a radical regeneration and purification process to turn waste into first quality carpet, and that's exactly how ECONYL® carpet fiber begins—by rescuing waste nylon, such as old fishing nets, from our planet's oceans and discarded carpet destined for landfill. The reclaimed nylon is cleaned, sorted, recycled back to its original purity, and reborn as ECONYL® fiber.

Imagine, regenerated nylon that's exactly the same as virgin nylon. Beautiful, hard-wearing, and infinitely recyclable.

As well as being a solution on waste, ECONYL® regenerated nylon is also better when it comes to climate change. It reduces the global warming impact of nylon by up to 80% compared with the material from oil. For every square yard of Crafted carpet made with ECONYL® fiber, you save roughly 8.3 lb CO₂eq emissions which is equal to driving 20 miles in a car.

SUSTAINA



The Sustaina Backing System provides a uniquely breathable cushioned backing, free of all red-listed components. It's the perfect complement to Foam and Frost.



RECYCLE

Combined with ECONYL® fiber, Foam and Frost are constructed with

82% recycled content:

26%

Post-Consumer **56%**

Pre-Consumer



SUSTAIN

Planet-friendly Sustaina contains no PVC, polyurethane or any red-listed components.



BREATHE PE


Sustaina's unique construction makes it breathable, allowing moisture vapor to transfer through the product.

Warranted up to 99% RH and pH of 12 utilizing Sustaina 99 adhesive.



PERFORM

All the underfoot comfort, appearance retention and sound insulating characteristics you'd expect from high performance backing.

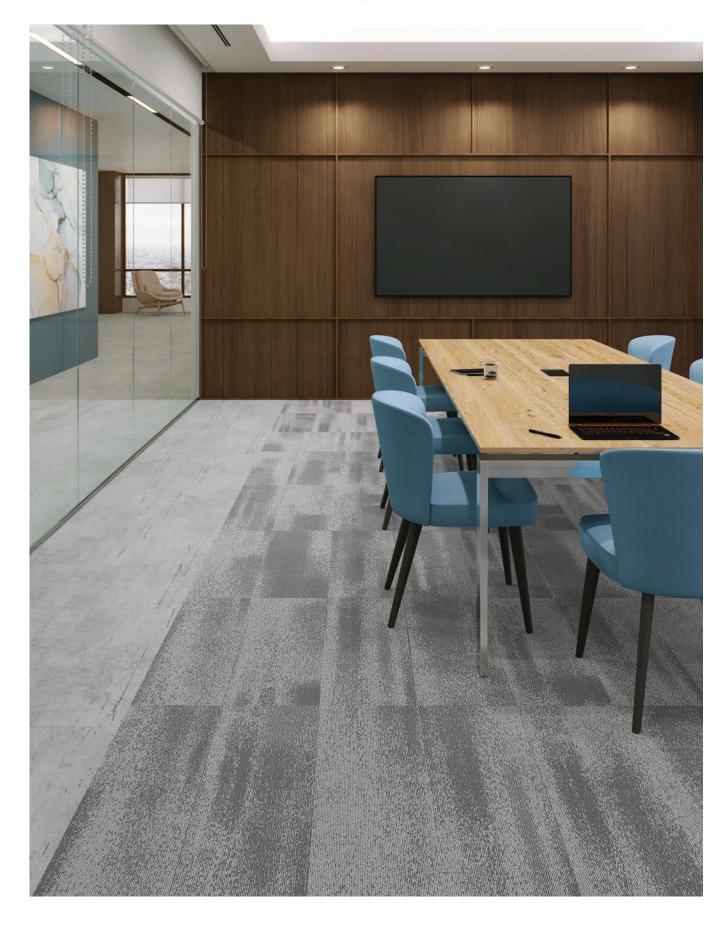

An Essential Array Of Warm and Cool Hues

This well-balanced color palette is further enhanced through its fabrication which infuses both matte and lustrous fibers to offer depth and visual interest with all the added performance benefits of a solution dyed nylon.

SHOWN IN FOAM



For the most accurate color representation, please request a sample by contacting Customer Service at **1-888-633-4770** or by visiting **atlasmasland.com**.

CRAFTED

Construction

	Frost	Foam
Style Number	Т7993	T7994
Tile Size	12"W x 36"L (30.48cm x 91.44cm)	12"W x 36"L (30.48cm x 91.44cm)
Construction	Patterned Loop	Patterned Loop
Gauge	1/12	1/12
Tufted Fiber Weight	16 oz./Sq. Yd. (542 g/m²)	16 oz./Sq. Yd. (542 g/m²)
Total Weight	94.5 oz./Sq. Yd. (3,204 g m²)	94.5 oz./Sq. Yd. (3,204 g/m²)
Pile Height	.250"/.125" (6.35mm/3.18mm)	.250"/.125" (6.35mm/3.18mm)
Total Thickness	.390" (9.91mm)	. 390" (9.91mm)
Fiber Content	ECONYL® 100% regenerated Type 6 nylon	ECONYL® 100% regenerated Type 6 nylon
Dye Method	Solution Dyed	Solution Dyed
Primary Backing	Synthetic	Synthetic
Secondary Backing	Sustaina (PVC-free polyester non-woven felt cushion)	Sustaina (PVC-free polyester non-woven felt cushion)
GLP Certification	GLP1922	GLP1922

Product manufactured utilizing pre-consumer and post-consumer recycled content. Please see environmental specifications for additional information.

Specifications may vary slightly over the life of a product. For current specifications, please visit maslandcontract.com.

Performance

Environmental	Meets the standards for the Carpet & Rug Institute's Indoor Air Quality Green Label Plus

Carpet Testing Program

3rd party certified to the NSF/ANSI 140 Sustainable Carpet Standard

Flammability Rating Flooring Radiant Panel ASTM E-648 and/or NFPA 253

Greater than 0.45 watts/CM² Class 1 (EU) BFL S 1

Surface Flammability of Carpets and Rugs (16 CFR Chapter II Subchapter D,

Part 1630 CPSC FF 1-70) also referenced as ASTM D-2859

Smoke Density Passes NBS Smoke Chamber Test ASTM E-662 (flaming mode)

Colorfastness to Light 4.0 or better

Static Rating Less than 3.5 kV. Antistat warranted for the life of the carpet

Warranty Lifetime Commercial Limited Warranty





Slight variations between sample swatches and production goods are to be expected and are considered normal. Likewise, such variations will occur between production goods of different dye lots. Masland laboratory matches are obtained under cool white fluorescent lighting. Chair pads are recommended to enhance the aesthetic value and longevity of the product.

Visit us at maslandcontract.com for additional product offerings, detailed specifications, installation instructions, maintenance and warranty information.



©2019 Masland Contract**. These patterns are protected under the U.S. Copyright Act of 1976 and may not be duplicated without Masland's express written permission. Any unauthorized duplication or approximation of a Masland design constitutes copyright infringement in violation of federal law.